


# armStone™ A9

## Single Board Computer with NXP i.MX 6 Processor

### Characteristics


- Cortex®-A9 Quad-/ Dual-/ Single-Core with 1GHz
- up to 4GB RAM and 512MByte SLC Flash
- TFT via 2x LVDS (up to WUXGA) and 1x RGB (up to SVGA) and DVI (up to FullHD)
- 2D, 3D and 5 Window Layer
- NEON, FPU, OpenGL/ ES 2.x, 3D, MPEG4
- 1x Ethernet 10/ 100/ 1000MBit
- 1x USB 2.0 Device, 4x USB 2.0 Host
- 1x CAN 2.0, 1x I<sup>2</sup>C, 1x SPI
- 3x Serial (2x RS232, 1x TTL 3,3V-Level)
- 1x micro-SD Card, 1x PCIe, 1x SATA
- Audio Line IN/ OUT/ MIC, Touch via I<sup>2</sup>C
- Linux/ WEC 7/ 2013
- 5V/ 8-14V Low Power Design (about 4W typ., 8-14V opt.)

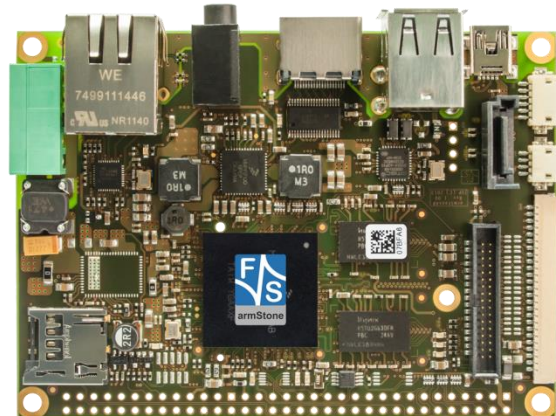

### Description

The armStoneA9 is a compact and very powerful SBC. The PicoITX form factor is perfectly suited for the development of compact applications. The Cortex®-A9 CPU by NXP is available in Quad-/ Dual-/ and Single-Core version and ideal for multi-media applications. The CPU has functions such as 2D/ 3D acceleration, Window Layer, FPU, NEON, MPEG4, as well as OpenVG and it can be provided for more than 10 years. The module comes with a high capacity of RAM and Flash memory and numerous communication interfaces (CAN, PCIe, SATA, etc.). Furthermore it offers 2 LVDS interfaces up to WUXGA, a RGB interface up to SVGA and DVI up to FullHD simultaneously. Touch panels can be connected via an external controller board (I<sup>2</sup>C). At a power supply of 5V (8-14V), the power consumption is only about 4W typ.

### Block Diagram

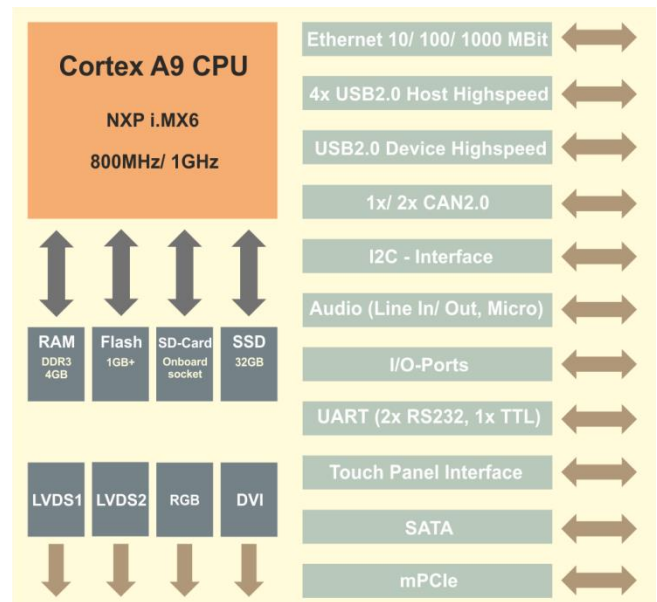

### On-Board Operating System



The customized WEC 7/2013 (Bootloader, Kernel, interface drivers, Silverlight, Mediaplayer, IE) is an efficient real-time operating system.

Together with Compact Framework 3.5 it is ideal for software development.



The F&S Linux BSP (4.1., uboot, BSP, Buildroot, QT, GStreamer) contains the customized kernel and all interface drivers, including Source. A Cross Compiler Toolchain is offered for the development of own software. Additionally, there is a pre-configured Ubuntu Root Filesystem.

### Starterkit

The armStoneA9-SKIT is available with Linux or WEC 7. It consists of an armStoneA9 board, a set of cables, memory media and the access data for the download area. In the download area the current software and documentation can be downloaded and installed. A forum with 3000+ registered customers offers example programs and free support for customers. A Workshop and suiting display kits pave the way for an easy start of development.



# Connector Assignment

## J1 – Feature Connector

1	VCC3.3 (J5 pin 26)	12	XGPIO8/SPI_CLK	23	XGPIO15/ROW5	34	VCFL_ON	45	LINEOUT_R	56	RTS0 (RS232)
2	VCC5	13	TX1/GPIO0	24	XGPIO16/ROW6	35	ADC_IN3	46	GND	57	TX0 (RS232)
3	XGPIO0/COL0	14	XGPIO9/SPI_CS <sub>n</sub>	25	XGPIO17/ROW7	36	RXD2 (RS232)	47	GND	58	CTS0 (RS232)
4	XGPIO1/COL1	15	RX1/GPIO1	26	XGPIO18	37	GND	48	LINEIN_L	59	nc
5	XGPIO2/COL2	16	I2CLK/SPI_MOSI	27	GND	38	TXD2 (RS232)	49	LINEOUT_L	60	nc
6	XGPIO3/COL3	17	I2DAT/SPI_MISO	28	PWMOUT0	39	VCC3.3	50	GND	61	GND
7	XGPIO4/COL4	18	XGPIO10/ROW0	29	ADC_IN0	40	VCC5	51	RESETBTN	62	VCC5 (COM keypin)
8	XGPIO5/COL5	19	XGPIO11/ROW1	30	PWMOUT1	41	MIC1 (Audio pin 1)	52	VCC3.3	63	CANRX/CANL
9	XGPIO6/COL6	20	XGPIO12/ROW2	31	ADC_IN1	42	GND	53	nc (COM pin1)	64	CANTX/CANH
10	XGPIO7/COL7	21	XGPIO13/ROW3	32	PWMOUT2	43	nc	54	nc	65	BOOTSEL
11	GND	22	XGPIO14/ROW4	33	ADC_IN2	44	LINEIN_R	55	RX0 (RS232)	66	VCC3.3

## Add-Ons

### TFT & Cap. Touch

7" WVGA Display with LVDS interface and fitting connection cable (25pol connector), furthermore, the display has a capacitive touch panel

### Displaykit LVDS

7" WVGA Display with LVDS interface and fitting connection cable (25pol connector)

### Displaykit RGB

7" WVGA Display with RGB interface and resistive Touchpanel, fitting connection cable, display adapter and touch cable

### Safe Filesystem (F3S)

It offers transaction safety on file level and therefore guarantees the consistency of the data, even in case of a blackout or other interferences while writing.

### Update Software

This program package allows a safe and easy update of the application program and the operating system via USB Stick or SD Card. Blackouts and other interferences during the update are considered.

### armStone Extension

Routes interfaces of the 66pin feature connector to standard connectors.

## Technical Data

Power Supply:	+5V <sub>DC</sub> / ± 5%
Power Consumption:	4W typ.
Digital I / O:	max. 66 I / O ports
Touch Panel:	4-wire, analogue resistive capacitive Touch via I <sup>2</sup> C (SINTF-ADP-CTOUCH)
Interfaces:	1x Ethernet 3x Serial (1x with RTS/ CTS/ 2x RS232/ 1x TTL Level) 4x USB 2.0 Host 1x USB 2.0 Device 1x I <sup>2</sup> C 1x SPI 1x CAN 2.0 1x micro-SD Card 1x Audio (IN/ OUT/ MIC) 1x miniPCIe 1x SATA
TFT LCD Interface:	TFT up to WUXGA via LVDS RGB up to SVGA
Screen:	DVI up to FullHD
RAM:	1GB (up to 4GB)
Program Memory:	128MB (up to 512MB)
Processor:	NXP i.MX 6 Cortex@-A9 (Quad-/ Dual-/ Single-Core) 800MHz/ 1GHz
Temperature Range:	0°C - +70°C (opt. -20°C - +85°C I-Temp. Version)
Size:	100mm x 72mm x 15mm (l x b x h)
Weight:	about 40g

## Standard Versions/ Order Notations

### aStoneA9-V1-LIN

Quad-Core, 1GB RAM, 128MB Flash, Audio, Ethernet, CAN, PCIe, SATA, LVDS/ RGB/ DVI, 0°C+70°C, Linux

### aStoneA9-V1-W13/ WEC7

Quad-Core, 1GB RAM, 128MB Flash, Audio, Ethernet, CAN, PCIe, SATA, LVDS/ RGB/ DVI, 0°C+70°C, WEC 2013/ WEC 7

### aStoneA9-V2-W13

Solo, 512MB RAM, 128MB Flash, Audio, Ethernet, CAN, PCIe, LVDS/ RGB/ DVI, -20°C+85°C, WEC 2013

### aStoneA9-V2-LIN

Solo, 512MB RAM, 128MB Flash, Audio, Ethernet, CAN, PCIe, LVDS/ RGB/ DVI, -20°C+85°C, Linux

### aStoneA9-V3-W13

DualLite, 1GB RAM, 128MB Flash, Audio, Ethernet, CAN, PCIe, LVDS/ RGB/ DVI, -20°C+85°C, WEC 2013

### aStoneA9-V3-LIN

DualLite, 1GB RAM, 128MB Flash, Audio, Ethernet, CAN, PCIe, LVDS/ RGB/ DVI, -20°C+85°C, Linux

## Standard Versions/ Order Notations

### aStoneA9-SKIT-WCE

aStoneA9-V1-WEC7, connection cable, 7" WVGA TFT with resistive touch panel and adapter, access data to documentation and software

### aStoneA9-SKIT-LIN

aStoneA9-V1-LIN, connection cable, 7" WVGA TFT with resistive touch panel and adapter, access data to documentation and software

Minimum Order Quantity for Special Versions: 300 pieces

